

Product Catalog 2027



Table of Contents

Message from Ryan Walker	1	Single-Stage Snowblower 36"	34
Walker Advantages	2	48" Dozer Blade	34
Models		48" Model R Dozer Blade	34
Model S	6	Perfaerator™	35
Model C	8	Boom Sprayer	36
Model T	10	Dethatcher	37
Model D	12	Spyker® Spreader Attachment	38
Model R	14	ROPS	38
Model B	16	Add-ons: Popular Options	
Model H	20	Utility Bed	39
Decks		Power Dump	39
Mulching Decks and Kits	23	Hi-Dump®	39
Collection Decks	24	Hand Lever Deck Height Adjuster	40
Side Discharge Decks	25	Foot Pedal Deck Height Adjuster	40
Rear Discharge Decks	26	Deck Height Washers	40
Multi-Deck	27	Breakaway Blades	42
Add-ons: Implements		Dense-Pak Blades	42
Implement Hitch	29	Dump Bins	42
Option: Tail Weights	29	Large Hole Screen	42
Rotary Broom	30	Power Tilt-Up®	43
Dozer Blade (48" or 60")	31	Dual Tail Wheel	44
Loader Bucket	31	Spread Axle Tail Wheel	44
Two-Stage Snowblower (42" or 50")	32	Adjustable Footrests	44
Add-ons: Attachments		Tail Wheel Lock	45
Hard Cab	33	Big Tire Fork Kit	45
Soft Cab	33	Walker Mower Specifications	Back Cover



Go to walker.com to see more information on all Walker products

Note: Some models in this catalog are shown with non-standard add-ons and options.



Since my grandpa, dad, and uncle designed the first Walker Mower in 1977, it has always been intentionally different from other lawn mowers. At the time, my family was frustrated with the challenges we were having with mowing our own lawns quickly, easily, and with satisfying results. There was simply no riding mower available that could mow the way we wanted, so we designed and built our own. Like my grandpa always said, "If you can't buy it, build it," and so we did.

Over the years we have continued to improve the design of the Walker Mower, with each change improving the Walker's agility, ease of use, and cut quality. Our family has set a high standard of performance, and every aspect of the Walker Mower is created with that standard in mind.

Today, Walker Mowers are American made and hand built with pride in Fort Collins, Colorado. When you buy a Walker, you are not only buying a high-quality product, you are joining the Walker Mower family.

Ryan D. Walker

Ryan Walker, President
Walker Manufacturing



Walker Advantages

Front-Mount Deck

True floating deck moves independently from the tractor over hills and valleys



Flexible deck suspension allows the deck to freely articulate over uneven terrain

Short Deck Coupling

Scalp less grass on a crest



Cut more grass in a valley



Front-Mount Deck

Walker Mowers are designed for a superior cut, and the key is their front-mount deck. This design minimizes the mower's impact on the grass before it's cut, preventing the grass from being flattened. This means a more consistent, carpet-like finish because the grass stands up better for a clean cut.

The front-mount deck also moves independently of the tractor, thanks to its flexible suspension and torsion-flex frame. This allows the deck to follow the curves and bumps of the lawn, significantly reducing scalping and ensuring a smooth, beautiful cut, even on uneven terrain.

Short Deck Coupling

The distance between the drive wheels and the front caster wheels of the deck on a Walker Mower is minimal. This shorter distance allows the deck to closely follow the ground's ups and downs, rather than bridging over them.

As a result, Walker mowers reduce scalping on hills and avoid leaving uncut grass in valleys, which is a common problem with mid-mount decks found on other mowers.

Interchangeable Decks and Add-ons



Switch the deck for one of a different size or type, or switch to an add-on

Easy access to engine and drivetrain



Tilt-Open Bodies and Tilt-Up Decks

Easy and safe access for deck cleaning and blade maintenance



Interchangeable Decks and Add-ons

Whether handling grass, leaves, or snow, Walker Mowers are designed for year-round productivity. On most models, decks can easily be switched for larger or smaller collection, mulching, or discharge decks to suit the task at hand. Plus, with dozens of add-ons such as a dethatcher, dozer blades, or snowblower, the Walker is one of the most versatile mowers on the market.

Tilt-Open Bodies and Tilt-Up Decks

Walker Mowers are designed for easy maintenance with two key features:

Tilt-Open Bodies: The entire body of the mower lifts up easily (with gas-spring assistance), giving quick, tool-free access to the engine, belts, and other internal parts for simple service and repairs.

Tilt-Up Decks: The mower deck can be quickly tilted up and secured, providing safe and easy access to the blades, deck housing, and discharge chute for cleaning or maintenance. The Model H offers an optional Power Tilt-up® deck lift. This feature also makes the mower more compact for storage or transport.

Walker Advantages

Grass Handling System® (GHS) and Integrated Components




Internal GHS 10.5"
(26.67 cm) Blower
(Models C19, T, D)



Internal GHS 12.75"
(32.38 cm) Blower
(Model S18)



Internal GHS 13.25"
(33.66 cm) Blower
(Model C27i)

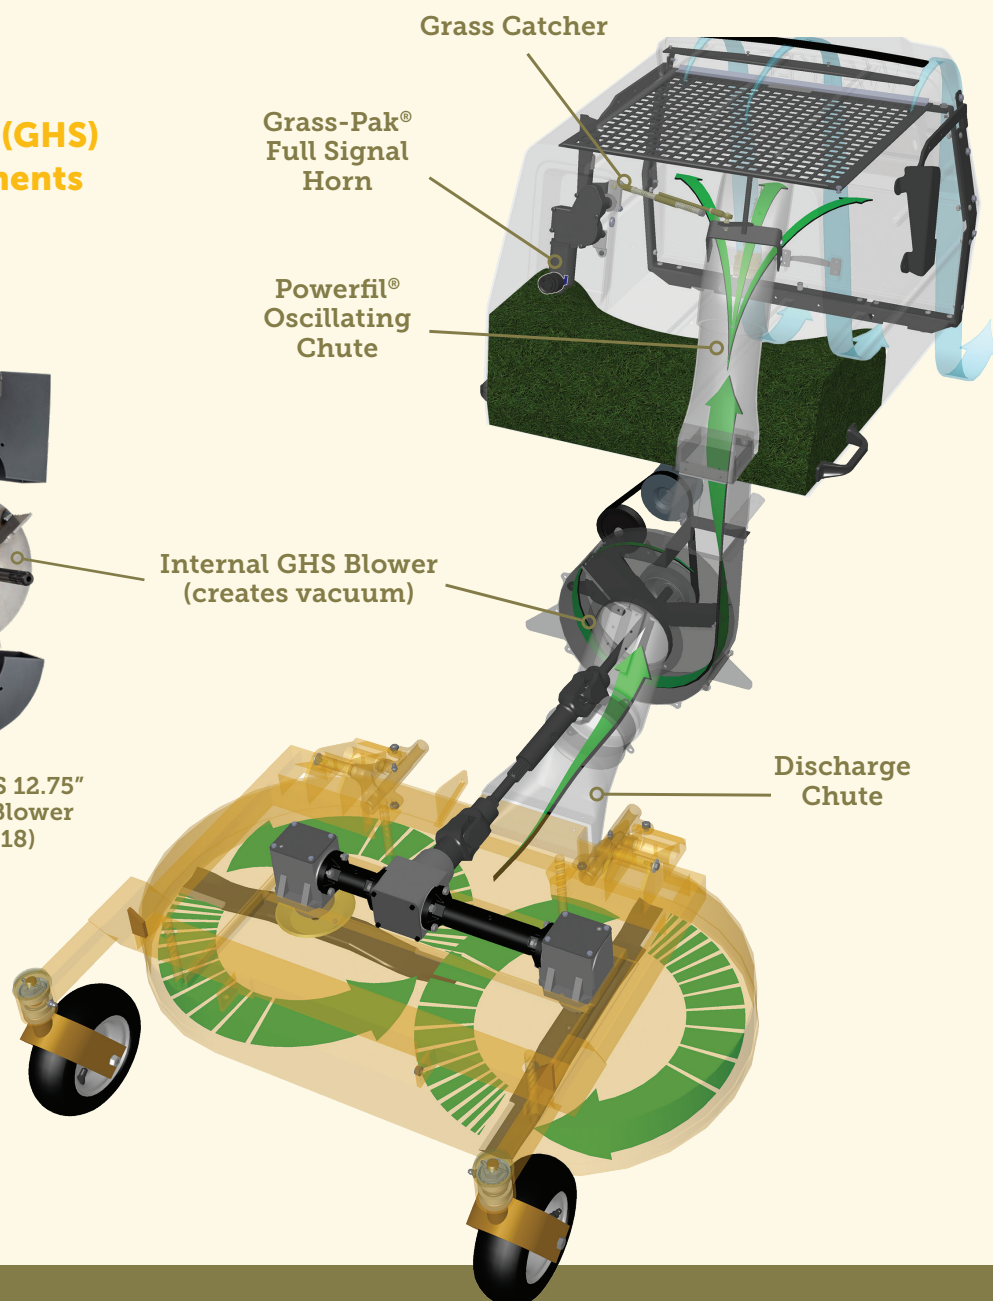

Grass Handling System® (GHS)

Walker Mowers feature an internal Grass Handling System® (GHS), designed for the most efficient collection of clippings, leaves, and debris. This system vacuums materials from the deck into a rear-mounted catcher, leaving a carpet-like finish.

The PowerFil® oscillating chute ensures even packing, and a Grass-Pak® full signal alerts the operator when the catcher is full. Emptying is easy: just tilt the catcher back, or use the optional Power Dump or Hi-Dump® from the operator seat.

Integrated Components

Walker Mowers are engineered to ensure the entire grass collection

system is internal. This intentional effort allows Walker Mowers to retain their compact footprint. There are no bulky tubes or bags extending beyond the footprint of the mower.





Precise Control: Steering and Handling

Forward
Speed
Control

Steering
Levers
for Precise
Fingertip
Control



Compact



Compact

Some lawns have tight spots like narrow gates, tricky landscaping, or other obstacles that make mowing a challenge. The compact size of a Walker Mower helps maneuver in these areas easily and efficiently. A compact design can get into and out of tight spaces like gates, between garden beds and trees, and into fence corners with no problem.

Precise Control: Steering and Handling

Walker Mowers offer precision steering and handling that makes mowing feel effortless. Two key features make this possible:

Forward Speed Control: Think of this as your mower's cruise control. Use the lever to set the forward travel speed and a friction lock holds that speed. To stop, just pull the Forward Speed Control back to

the Neutral-Park position.

Steering Levers: These levers give instant control the moment you apply pressure. Each one is spring-dampened for smooth operation, allowing you to steer with just one hand using gentle fingertip pressure. Pull back the left lever to turn left, pull back the right lever to turn right, and pull back both levers to reverse.

Model S

Entry-level collection
mower, ideal for
smaller properties



Model shown: S18

Standard Features

- Grass Handling System® (GHS)
- 7 bushel (8.7 cu. ft.) grass catcher
- Commercial engine air filtration
- Hydro-Gear ZT3100 transmissions
- 12.75" (32.38 cm) Thru-Shaft® PTO GHS blower
- Oscillating PowerFil® chute with Grass-Pak® full signal
- Precision steering and handling
- Forward Speed Control
- Tilt-up decks and tilt-open body
- Flexible deck-carrier frame
- 7.4 MPH (11.9 km/h) maximum ground speed


See more about Model S:
walker.com/model-s



With Walker's Grass Handling System® and an elegant, patented Thru-Shaft PTO Blower® design, the Model S is an excellent, entry-level mower for experiencing Walker's signature beautiful cut and zero-turn productivity. The Model S is simple and easy to operate, and very efficient at mowing residential properties.

Reliable Power

18 HP Briggs and Stratton Vanguard engine



Dual, Independent Integrated Transaxles

Hydro-Gear® ZT3100



Robust Vacuum

12.75 inch blower for powerful suction



Heavy Duty Air Filter

Optimal engine protection with 3-stage air filtration



Grass Collection

7 bushel (8.7 cu. ft.)



Interchangeable, Tilt-up Deck

Easy access to blades for cleaning and maintenance

Large Fuel Tank

4 gallon (15.1 liter)

Model shown: S18

Deck/Kit types and sizes:

- Collection 36"-48" (91 cm-122 cm)
- Mulching 36"-48" (91 cm-122 cm)
- Discharge 36"-56" (91 cm-142 cm)

Popular Add-ons

- Power Dump
- LED Headlights
- Adjustable Footrests
- Dethatcher
- 48" (122 cm) Dozer Blade
- 36" (92 cm) Single-Stage Snowblower
- Spyker® Spreader with Mount
- Comfort Seat with optional Armrests

Model C

**Commercial collection
mower that is compact
and capable**



Model shown: C27i

Standard Features

- Grass Handling System® (GHS)
- 7 bushel (8.7 cu. ft.) or 10 bushel (12.4 cu. ft.) grass catcher
- Rehlko PRO Extended-Life Oil and Filter
- High capacity, commercial engine air filtration with remote intake and turbine precleaner
- Oscillating PowerFil® chute with Grass-Pak® full signal
- Precision Steering and Handling
- Forward Speed Control
- Tilt-up decks and tilt-open seat pan
- Flexible deck carrier frame
- 8 MPH (12.8 km/h) maximum ground speed (C27i)


See more about Model C:
walker.com/model-c



Since its introduction in 1986, the Model C has been continually refined and improved with the commercial operator in mind, especially those who maintain residential properties. The Model C is compact, and with its ability to use implements, is also a very versatile mower with impressive productivity.

Reliable Power

Rehiko Command Pro engine 27 HP (C27i) or 19 HP (C19)



Dual, Independent

Integrated Transaxles

Hydro-Gear® ZT3100 (C27i) or Walker M7 (C19) Transmissions



Electric Clutch

Efficient power transfer from the engine to the drive train and blades



Robust Vacuum

13.25 inch (C27i) or 10.5 inch (C19) blower for powerful suction



Grass Collection

7 bushel (8.7 cu. ft.) or 10 bushel (12.4 cu. ft.)



Large Fuel Tank

4.7 gal (17.8 liter)

Interchangeable, Tilt-up Deck

Easy access to blades for cleaning and maintenance

Model shown: C27i

Deck/Kit types and sizes:

- Collection 42-52" (107 cm-132 cm)
- Mulching 42-60" (107 cm-152 cm)
- Discharge 42-60" (107 cm-152 cm)

Popular Add-ons

- LED Headlights
- Dethatcher
- Perfaerator™
- Implement Hitch with electric ram lift
- 48" (122 cm) Dozer Blade
- 42" (107 cm) Two-Stage Snowblower
- Power Dump

Model *T*

The go-to collection
mower for performance
and versatility



Model shown: T27i

Model T Standard Features

- Grass Handling System® (GHS)
- 10 bushel (12.4 cu. ft.) grass catcher
- Commercial air filter with remote air intake and turbine pre-cleaner
- Model 7 transmissions with ductile cast iron gearbox final drives
- Instrument panel
- Tilt-up deck and tilt-open body
- 4.7 gallon (17.8 liter) fuel tank
- 10.5" (27 cm) GHS blower
- Transmission Oil Performance System (TOPS)™
- Mechanical tensioner PTO clutch
- 7 MPH (11.2 km/h) maximum ground speed


See more about Model T:
walker.com/model-t



The Model T is the go-to Walker for commercial operations and a favorite among performance oriented customers. Intended specifically for commercial use, each aspect of the Model T has been designed to meet the most demanding expectations of operators who want fast and easy mowing with beautiful results.


Reliable Power

Carbureted or EFI Rehlko engine 22.5 HP (T23) or 26.5 HP (T27i)



Dual, Independent Integrated Transaxles

Walker M7 Transmissions



Robust Vacuum

10.5 inch high speed blower for powerful suction



Heavy Duty Air Filter

Optimal engine protection with 3-stage air filtration



Grass Collection

10 bushel (12.4 cu. ft.)



Interchangeable, Tilt-up Deck

Easy access to blades for cleaning and maintenance

Large Fuel Tank

4.7 gal (17.8 liter)

Model shown: T27i

Deck/Kit types and sizes:

- Collection 36"-52" (91 cm-132 cm)
- Mulching 36"-60" (91 cm-152 cm)
- Discharge 36"-74" (91 cm-188 cm)

Popular Add-ons

- Power Dump
- Hi-Dump® grass catcher
- Spread Axle Tailwheel Kit
- All-Terrain Tires
- LED headlights
- Dethatcher
- Implement Hitch with electric ram lift
- 42" (107 cm) Two-Stage Snowblower
- 48" (122 cm) Dozer Blade
- Spyker® Spreader with Mount

Model *D*

**Diesel-powered,
versatile, commercial
collection mower**



Model D Standard Features

- Grass Handling System® (GHS)
- Liquid-cooled with self-cleaning radiator
- 10.5" (27 cm) GHS blower
- Impressive 34 ft-lb torque
- High-capacity, commercial air filter with remote air intake and turbine pre-cleaner
- Grammer Suspension Seat
- Tilt-up deck and tilt-open body
- Model 7 transmissions with ductile cast iron gearbox final drives
- Instrument panel
- High output 40-amp charging system
- Transmission Oil Performance System (TOPS)™

Model shown: D21d

See more about Model D:
walker.com/model-d



The Model D is an industrial-grade Walker Mower with impressive power and agility. The Model D is the only diesel-powered Walker Mower equipped with the Walker Grass Handling System® (GHS). The Model D effortlessly handles the harshest mowing environments and extended running times without compromising efficiency or power.

Reliable Power

20.9 HP Kubota D722
Diesel Engine



Dual, Independent Integrated Transaxles



Robust Vacuum

10.5 inch blower for
powerful suction



Radiator

Self-cleaning radiator for
effective heat dissipation
on long, hard run times



Grass Collection

10 bushel (12.4 cu. ft.)



Large Fuel Tank

4.7 gal (17.8 liter)

Interchangeable, Tilt-up Deck

Easy access to blades
for cleaning and
maintenance

Model shown: D21d

Deck/Kit types and sizes:

- Collection 36"-52"
(91 cm-132 cm)
- Mulching 36"-60"
(91 cm-152 cm)
- Discharge 36"-74"
(91 cm-188 cm)

Popular Add-ons

- Hi-Dump® grass catcher system
raises 67" (171 cm) with automatic
catcher door actuation
- Power Dump
- All-Terrain Tires
- LED Headlights
- Dethatcher
- Operator Soft Cab
- Implement Hitch with electric
ram lift
- 42" (107 cm) Two-Stage
Snowblower
- 48" (122 cm) Dozer Blade

Model *R*

**Lowest priced,
non-collection Walker
mower, designed
specifically for
residential owners**



Model R Standard Features

- 22 HP Rehlko KT722 with Smart-Choke® technology for easy starts in hot or cold weather
- Kohler PRO Extended Life Oil and Filter
- Dual Independent Hydro-Gear ZT-2200 (R22) or commercial grade ZT3100 (R22x) Integrated Transaxles
- Ogura® electric blade clutch and brake with easy pull/push switch operation
- Tilt-up deck and tilt-open seat
- 3 gallon (11.4 liter) fuel tank with integrated fuel level gauge
- Precision Steering and Handling
- 7 MPH (R22) or 8 MPH (R22x) maximum ground speed

Model shown: R22x

See more about Model R:
walker.com/model-r



The Model R is the perfect Walker Mower for residential owners. The belt-driven mower blades are smooth and quiet, while the fingertip steering makes operation of the mower precise and easy. The Model R provides a premium Walker experience at an economical price, so you can bring home fast, easy, beautiful mowing.

Reliable Power


22 HP Rehlko KT722
Engine with Smart-Choke



Dual, Independent

Integrated Transaxles

Hydro-Gear® EZT-2200
(R22) or ZT3100 (R22x)




Collection Option

3.3 bushel Accelerator®
Grass Catcher Kit



Electric Clutch

Efficient power transfer
from the engine to the
drive train and blades



Smooth and Quiet

The deck is belt-driven
for smooth and quiet
operation



Large Fuel Tank

3 gal (11.4 liter)

Removable, Tilt-up Deck

Easy access to blades
for cleaning and
maintenance

Model shown: R22

Deck/Kit types and sizes:

- Side discharge 42" (107 cm), 48" (122 cm), or 54" (137 cm)
- Mulch kits available for 42" (107 cm) and 48" (122 cm) side discharge decks

Popular Add-ons

- 48" (122 cm) Dozer Blade
- Mulching Kit including bolt-in baffles and serrated mulching blades
- Accelerator® 3.3 bushel (4.2 cu. ft.) side-mount grass catcher
- Comfort Seat (standard on R22x)
- Armrests
- Tow Hitch
- LED light kit (standard on R22x)

Model *B*

Discharge or mulch, lightweight, responsive, and well balanced for superior use on hills



Model B Standard Features

- Hydro-Gear ZT3100 transmissions
- High-capacity, commercial engine air filtration with turbine precleaner
- Tilt-up deck and tilt-open body
- Ogura® electric blade clutch
- Rehlko PRO Extended Life Oil and Filter
- Flexible deck-carrier frame allows the deck to freely articulate, producing a smooth cut, even over uneven turf
- Precision steering and handling
- Forward Speed Control
- 8 MPH (13 km/h) maximum ground speed (9 MPH with 20" Big Tire Kit option)

Model shown: B27ix


See more about Model B:
walker.com/model-b



The Model B is compact, balanced, and fast. It is a Walker Mower designed to run side discharge and mulch decks on difficult properties with hills, uneven terrain, and obstacles, all while leaving a beautiful cut. Plus, with a variety of spring and winter add-ons, the Model B is capable of productivity in any season.

Reliable Power

Rehiko Command Pro
Engine 22.5 or 26.5 HP




Dual, Independent Integrated Transaxles

Hydro-Gear® ZT3100



Easy PTO

Integrated Ogura® electric
clutch with Soft Start



Versatile Add-ons

The Spyker Spreader for
spreading materials.



Hillside Stability

The weight of the Model B is well
balanced over the drive tire to give
superior traction on hills.



Large Fuel Capacity

9.4 gallon (35.6 liter) B27ix
4.7 gallon (17.8 liter) B23, B27i

Interchangeable, Tilt-up Deck

Easy access to blades
for cleaning and
maintenance

Model shown: B27ix

Deck/Kit types and sizes:

- Mulching 36"-60"
(91 cm-152 cm)
- Discharge 36"-74"
(91 cm-188 cm)

Popular Add-ons

- Utility Bed
- 36" (92 cm) Single-Stage
Snowblower
- Spyker® Spreader with Mount
- 48" (122 cm) Dozer Blade
- LED Headlights*
- Suspension Seat*
- 20" Big Tire Kit*
- Tow Hitch
- Dethatcher
- Implement Hitch
- Accelerator® 3.3 bushel (4.2 cu.
ft.) side-mount grass catcher

Some models shown with optional equipment. *Standard on Model B27ix.

Model *B*27ix

The B27ix is a high-performance, non-collection mower engineered specifically for large-scale properties where efficiency is paramount. It pairs a powerful 26.5 HP Rehlko EFI engine with support for decks up to 74". Boasting a modern, aggressive visual identity and newly designed anti-spray fenders, the B27ix delivers an industry-leading power-to-weight ratio. This lightweight agile design ensures superior hillside handling and unmatched productivity compared to bulkier competitor machines. Its wide stance, paired with 20x12-10 turf tires, maintains exceptional traction on slopes while delivering a fast, smooth ride across wide-open fields. For long days on the job, a full spring-suspension seat comes standard to ensure extreme operator comfort.

Competitive Advantages

- **Signature Quality, Beautiful Cut:** The signature Walker cut in a powerful, high-performance package.
- **Extended Runtimes:** Increased fuel capacity reduces downtime, keeping crews productive.
- **Hillside Performance and Handling:** A low center of gravity with a wide tread width provides superior control and stability, specifically optimized for larger deck widths.
- **High Agility:** Delivers big-deck productivity in a compact chassis that out-maneuvers bulkier competitor machines.
- **Superior Efficiency:** Engineered for higher productivity and faster completion times than standard 60-inch class competitors.
- **Bold New Look:** An aggressive design featuring black wheels and new fenders to protect the operator from spray.





Newly designed anti-spray fenders to protect the operator

A full spring-suspension seat comes standard for all-day operator comfort

Powerful 26.5 HP Rehlko EFI engine with support for decks up to 74"

20x12-10 turf tires to maintain exceptional traction on slopes

See more online:



Model **H**

**High production,
discharge or mulching,
versatile commercial
mower**



Model shown: H38i

Model H Standard Features

- Hydro-Gear ZT3400 transmissions
- High capacity, commercial engine air filtration
- Grammer Suspension Seat
- 9.4 gallon (35.6 liter) fuel capacity, dual tanks
- Flexible deck-carrier frame
- Tilt-up deck and tilt-open body
- Spread axle tailwheel with large 13" (33 cm) tires
- 10 MPH (16 km/h) maximum ground speed
- Precision Steering and Handling

See more about Model H:
walker.com/model-h



The powerful Walker Model H excels at high production mowing, and has an efficient machine design for overall fuel, time, and operating cost savings. Plus, with a variety of available add-ons, the Model H can be productive year-round.


Reliable Power

Rehiko Engine
23.7, 26.5, or 38 HP



**Dual, Independent
Integrated Transaxles**

Hydro-Gear® ZT3400



Suspension Seat

Grammer suspension
seat is standard on Model H



Versatile Add-ons

Operator Hard Cab for
increased operator comfort



High Production

Equipped with Walker's most powerful engines, the Model H delivers exceptional productivity, easily handling all of Walker's largest decks and attachments.

Large Fuel Tanks

9.4 gal (35.6 liter)
fuel capacity,
two independent
4.7 gal (17.8 liter)
tanks



**Interchangeable,
Tilt-up Deck**

Easy access to blades
for cleaning and
maintenance

Model shown: H38i

**Deck/Kit types
and sizes:**

- Mulching 48"-61"
(122 cm-155 cm)
- Discharge 48"-74"
(122 cm-188 cm)

Popular Add-ons

- Power Tilt-Up® deck lift
- LED Headlights
- Deck arm adapter kit, allowing compatibility with six additional Walker mowing decks
- Operator Hard Cab
- Implement Hitch
- 50" (127 cm) Two-Stage Snowblower
- 60" (152 cm) Rotary Broom
- 60" (152 cm) Dozer Blade

Walker Decks and Kits

**Mulching, Collection,
and Discharge**



Mulching Decks and Mulching Kits



See more details
about mulching decks:
walker.com/decks#mulching

Mulching Decks and Mulching Kits

Mulching decks and kits are designed to efficiently re-cut material to fine particles and return them to the turf, leaving a beautiful cut.

Each Walker deck is uniquely configured to meet a very specific performance need. Whether the most important consideration in looking for the perfect deck is cutting width, handling grass clippings, material capacity or grass type, there is a Walker deck that will meet the specific maintenance need.

M36

- 36" (91 cm)
- Gear Drive
- Compatible with Models S, C19, T, D, and B23, B27i

M42

- 42" (107 cm)
- Gear Drive
- Compatible with Models S, C, T, D, and B23, B27i

M42B

- 42" (107 cm)
- Gear Drive
- Compatible with Models S, C, T, D, and B23, B27i

S42-R Mulch Kit

- Mulch Kit for S42-R
- P/N 1692-19

- Compatible with Model R only

M48

- 48" (122 cm)
- Gear Drive
- Compatible with Models S, C, T, D, B, and H*

S48-R Mulch Kit

- Mulch Kit for S48-R
- P/N 1692-20
- Compatible with Model R only

M52

- 52" (132 cm)
- Gear Drive
- Compatible with Models C, T, D, B and H*

S52 Mulch Kit

- Mulch Kit for S52
- P/N 8691-25
- Compatible with Models C, T, D, B, and H*

S60 Mulch Kit

- Mulch Kit for S60
- P/N 2692-2
- Compatible with Models C, T, D, B, H*

S61 Mulch Kit

- Mulch Kit for S61
- P/N 2692-1
- Compatible with Model H only

*Model H requires a Deck Arm Adapter Kit P/N 2430-10 for this deck.

Collection Decks

Standard Rotation:
Good for thick, wet, or heavy
clippings and debris



See how GHS works
walker.com/grass-handling-system



Reverse Rotation:
Exceptional cut quality when
clippings are light and dry



More about collection decks:
walker.com/decks#collection



Collection Decks

Collection decks are compatible with the Walker Grass Handling System® (GHS) Models S, C, T, and D. Clippings are discharged from the deck through the internal blower and discharge chute and are stored in the GHS catcher box.

Standard vs Reverse Rotation
Standard Rotation Blades come together at the front of the deck, moving material directly into the rear discharge chute. Standard rotation decks

are ideal for users who need to collect thick, heavy clippings, including leaves and other yard debris.

Reverse Rotation Blades come together at the rear of the deck, moving material around the edges of the deck before it is channeled into the discharge chute. Reverse rotation decks are ideal for users looking for exceptional cut quality in mowing conditions without wet, heavy clippings or debris.

C36R

- 36" (91 cm)
- Reverse Rotation
- Compatible with Models S, C19, T, and D

C42

- 42" (107 cm)
- Standard Rotation
- Compatible with Models S, C, T, and D

C42R

- 42" (107 cm)
- Reverse Rotation
- Compatible with Models S, C, T, and D

C48

- 48" (122 cm)
- Standard Rotation
- Compatible with Models C, T, and D

C48R

- 48" (122 cm)
- Reverse Rotation
- Compatible with Models S, C, T, and D

C52R

- 52" (132 cm)
- Reverse Rotation
- Compatible with Models C, T, and D

Side Discharge Decks

Sizes range from
36" (91 cm) to 74" (188 cm)



See more:
[walker.com/
decks#discharge](https://walker.com/decks#discharge)

Side Discharge Decks

Side discharge decks
cleanly and evenly
discharge cut grass from
under the deck housing to
the right of the operator.

S36

- 36" (91 cm)
- Gear Drive
- Compatible with Models S, C19, T, D, and B23, B27i

S42

- 42" (107 cm)
- Gear Drive
- Compatible with Models S, C, T, D, and B23, B27i

S42-R

- 42" (107 cm)
- Belt Drive
- Compatible with Model R only

S48-R

- 48" (122 cm)
- Belt Drive
- Compatible with Model R only

S48

- 48" (122 cm)
- Gear Drive or Belt Drive
- Compatible with Models S, C, T, D, B, and H*

S52

- 52" (132 cm)
- Belt Drive
- Compatible with Models C, T, D, B, and H*

S54-R

- 54" (137 cm)
- Belt Drive
- Compatible with Model R only

S56

- 56" (142 cm)
- Gear Drive
- Compatible with Models S, C, T, D, B, and H*

S60

- 60" (153 cm)
- Belt Drive
- Compatible with Models C, T, D, B, and H*

S61

- 61" (155 cm)
- Belt Drive
- Compatible with Model H only

S74

- 74" (188 cm)
- Gear Drive
- Compatible with Models T, D, B, and H*


*Model H requires a Deck Arm Adapter Kit P/N 2430-10 for this deck.

Gear vs Belt Drive Decks

Gear Drive:

Smooth, exceptional cut quality


S48 Gear Drive Deck
(top view, cover removed)

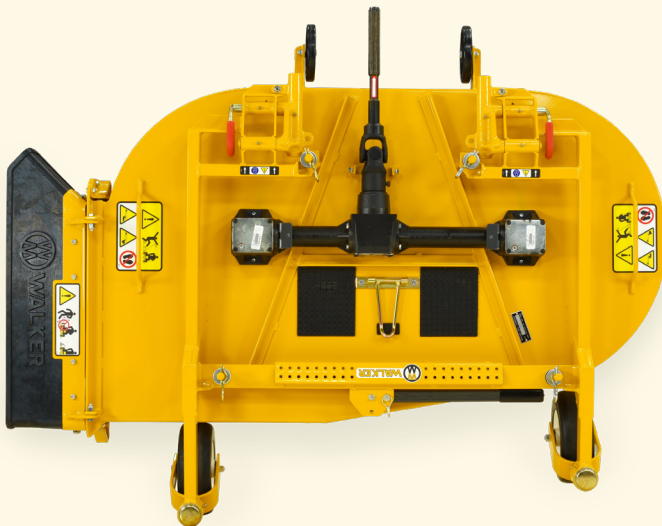

Belt Drive:

Flexible mowing, even in rough conditions

S48 Belt Drive Deck
(top view, cover removed)

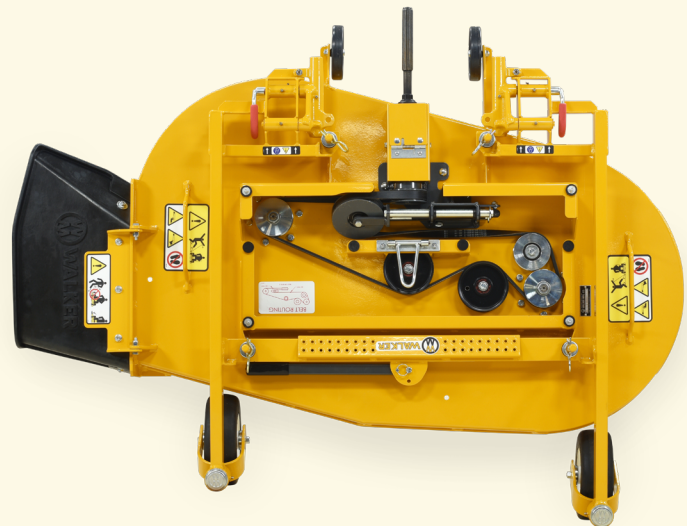

Rear Discharge Decks

Designed specifically for Model H mowers with high production and fast mowing speeds, Walker rear discharge decks process clippings numerous times before cleanly and evenly discharging clippings out the back of the deck, leaving an evenly cut turf.

Gear vs Belt Drive

Walker gear-driven decks utilize aluminum or cast iron gearboxes with Zerol bevel gear technology for durable and quiet function. The timed blades provide

exceptional cut quality and striping, and allow a compact design for improved trimming and maneuverability.


Walker belt-driven decks use a robust spindle and belt-tensioning idler design, and are best suited for rougher mowing conditions where debris or ground contact could occur. Walker belt-driven decks feature tool-free belt change and easy-to-maintain spindles and components.

R52

- 52" (132 cm)
- Belt Drive
- Compatible with Model H only

R64

- 64" (163 cm)
- Belt Drive
- Compatible with Model H only

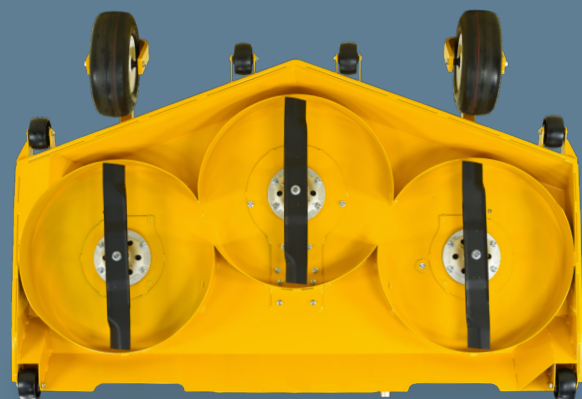


64" Rear Discharge Deck tilted up


For specific deck and kit compatibility see walker.com/decks

Multi-Deck

One deck, multiple uses

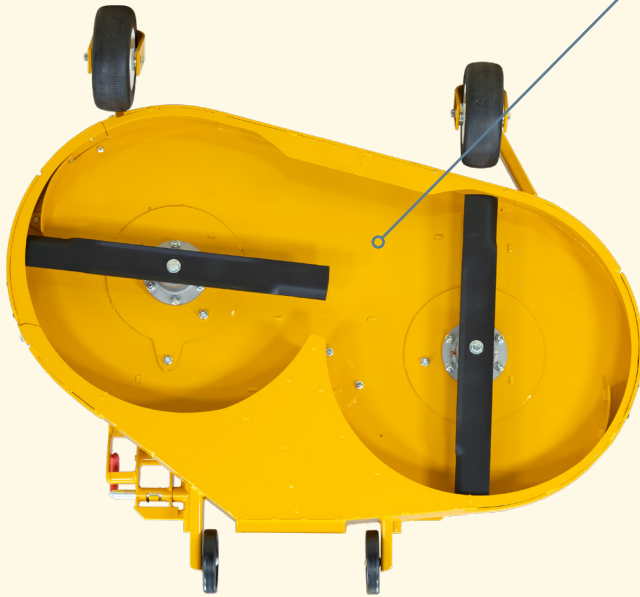

Collection
configuration

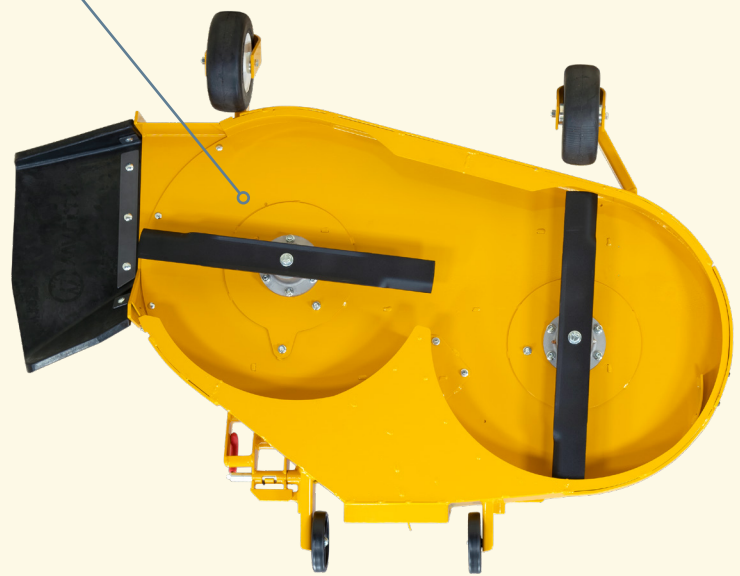


Side Discharge
configuration

Multi-Deck

Designed for customers who need to collect and side discharge throughout the season, the Walker Multi-Deck is a cost effective way to have two mowing styles in a single deck. This quiet, belt-driven deck uses a torsion-flex carrier to freely articulate and follow ground contour for a beautiful cut. And, like other Walker decks, the underside and blades are accessible with the tilt-up function for easy transition between configurations and maintenance.

U48

- 48" (122 cm)
 - Belt Drive
 - Compatible with Models S, C, T, and D.
- For specific deck compatibility see walker.com/decks



Learn more about the passion
and philosophy behind the
design of Walker decks:
[walker.com/advantage/
beautiful-cut/by-design](http://walker.com/advantage/beautiful-cut/by-design)



See all available deck add-ons:
walker.com/addons#options

Walker Add-Ons

Implements, Attachments,
and Options



Attachment shown:
Boom Sprayer.
See details on page 36.

Add-ons: Implements

Implement Hitch




The Implement Hitch allows the Walker Mower to use implements

Option: Tail Weights



Tail Weights offset the weight of an implement to maintain balance

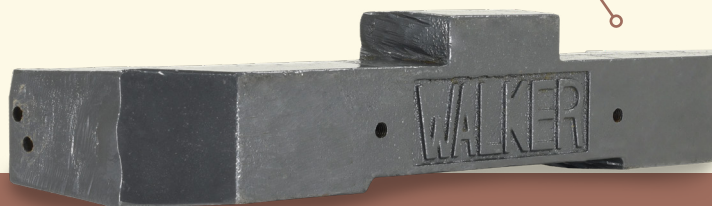

Walker implements mount interchangeably on most Walker models using the quick-change hitch system and require the use of the Implement Hitch. Tail weights may also be needed for counterbalancing.

Implement Hitch

The Implement Hitch can replace the mower deck and installs on the tractor in just a few minutes. Implements then slide onto the hitch and lock in place with the flip of a lever for true "quick-change"

capability. The Hitch assembly includes operator footrests and an electric power lift. A switch raises and lowers implements and is mounted on the Forward Speed Control lever for convenient operation.

Models C19, T, D:.....**P/N H10**
Model H:.....**P/N H19**
Models B, C23i:.....**P/N H22**

Option: Tail Weights

Tail weights are used for counterbalancing many Walker front-mounted add-ons such as a

snowblower, loader bucket, or rotary broom. Tail weights also improve handling when using large decks on the lighter models. The cast-iron weights bolt directly to the chassis frame or spread tail wheel axle.


Model B/R22x: 50 lb ...**P/N 4647-10**
Extra 50 lb weight**P/N 4647-11**
Model H: 50 lb¹**P/N 2647-10**
Model H: 55 lb²**P/N 2647-11**
Extra 55 lb weight.....**P/N 2647-6**
Model C19, T, D: 85 lb**P/N 7647**
Extra 10 lb weight.....**P/N 7647-5**
Model R22: 80 lb**P/N 1647-10**

Rotary Broom

Great for removing snow or debris from textured surfaces



Five angle positions

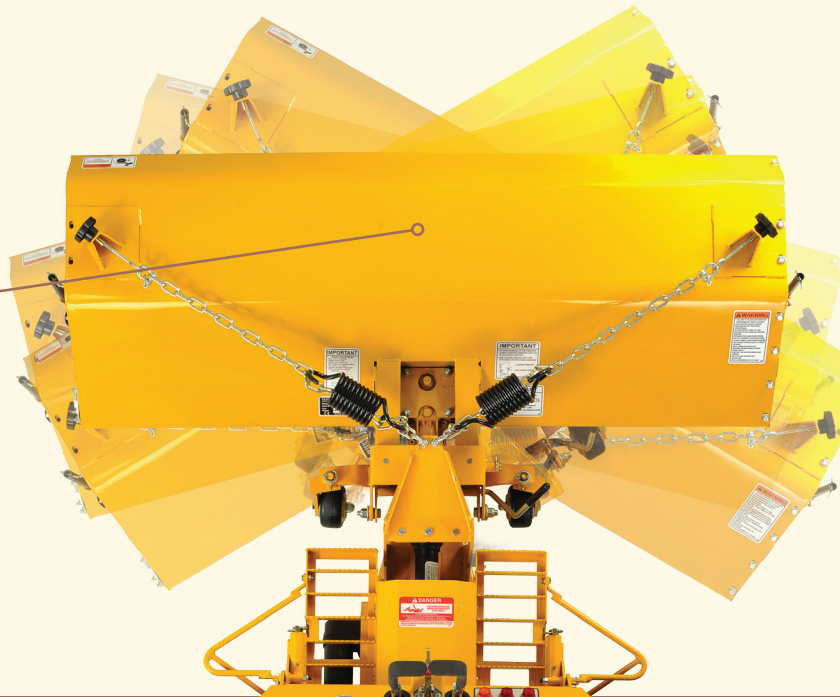

See all Walker implements:
walker.com/addons#implements

Rotary Broom

The Rotary Broom, with a 47" or 60" sweeping path and five-position angle head, is ideal for sweeping debris or light snow from hard surfaces.

The Rotary Broom also excels at sweeping and removing gravel and debris from turf areas along roads, paths, and playing fields, and can also be used for lawn dethatching and raking. Down pressure is spring-counterweighted, and is adjustable for great sweeping

action and minimal brush wear. The Rotary Broom is another way to increase the utility and year-round productivity of the Walker Mower. Requires Implement Hitch (See page 29).

Models C, T, D, B: 47" **P/N H13**
Model H: 60" **P/N H20**

Optional Gauge Wheels:
Available to better control depth of brush engagement. Especially useful when working on turf. **P/N I399**



Dozer Blade (48" or 60")



Optional
Polyurethane
Wear Edge Kit



Loader Bucket

Push, scoop, or
haul snow, dirt,
stone, gravel,
and mulch



Dozer Blade (48" or 60")

The Dozer Blade is a powerful tool able to tackle a variety of tasks, from cleaning up after a snowstorm to backfilling irrigation trenches. It is designed and built by Walker using the latest fabrication technology, precision tooling, and quality workmanship.

Blade design features a simple foot-actuated angle-adjust mechanism that allows the operator to quickly set the blade to five different positions. The

design also employs trip-over protection with adjustable preload, and $\pm 5^\circ$ of lateral articulation to follow ground contour for even cleaning over the full width of the blade, and integrated footrests. The steel cutting edge is replaceable, with four mounting positions for extended life. Requires Implement Hitch (See page 29).

Models C, T, D, B, H:

48" (122 cm) **P/N H11**

Models T, D, H:

60" (152 cm) **P/N H16**

An optional Polyurethane Wear Edge Kit

is available for use on

sensitive surfaces:

48" (122 cm) **P/N 6625-10**

60" (152 cm) **P/N 6625-11**

Loader Bucket

A versatile tool for landscaping work, the Loader Bucket will push, scoop, haul, and grade dirt, stone, gravel, and mulch. It lifts approximately 180 lb (82kg), holds 2.25 cu. ft. (64 liter) of material, and features 14" (36 cm) ground clearance for transport. The Loader Bucket has high-strength steel (continued on next page)



Two-Stage Snowblower (42" or 50")

Throw snow
up to 40 feet

construction with independent lift and dump controls powered by dual electric actuators. It is available for use on models T and D. The Loader Bucket requires an Implement Hitch (See page 29). **P/N H18**

Two-Stage Snowblower (42" or 50")

This powerful add-on throws snow up to 40 feet (12 meters) with a directional discharge spout that can be adjusted 228 degrees from the operator seat. The chute pitch-adjustment allows for fine control of throw angle and distance, and

comes with an optional electric control kit. With the electric height adjustment of the Implement Hitch, the Snowblower will make quick work of even the deepest of snowfalls. It requires an Implement Hitch (See page 29).

Models C, D, T, B, H:

42" (107 cm)..... **P/N H12**

Model H: 50" (127 cm) **P/N H17**

Optional Chute Control Kit:
P/N 6623-4

Note: Required for use with Operator Hard Cab.

**42" (107 cm) snowblower
shown on a Model T27i**



Add-ons: Attachments

Walker hard and soft cabs provide protection from winter elements



Hard Cab



Soft Cab



Walker attachments mount interchangeably on most Walker models, and do not require the use of an Implement Hitch. Some attachments replace the deck, while others attach to the deck or to the tractor body.

Hard Cab

The Hard Cab shields the operator from winter weather when using a snowblower, rotary broom, or dozer blade. It includes two hinged doors, glass windshield with electric windshield wiper,

LED headlights, and circulation fan. It requires a ROPS kit for mounting (see page 32). Compatible only with H models. **P/N A33**

Blade Angle Adjustment Kit

Use with 60" Dozer Blade:
P/N 6623-30

Snowblower Chute Control Kit

Use with 50" Snowblower:
P/N 6623-4

Soft Cab

The Soft Cab shields the operator

from winter weather. It features a hinged door with glass windshield, electric windshield wiper, and LED headlights. **P/N A17**

Mounting Kits:

Models D, T..... **P/N 7660-23**

Model B **P/N 7660-24**

Model C19..... **P/N 7660-25**

Front Cab Extension Flap

Protects operator when using Dozer Blade: **P/N 7661-4**



Single-Stage Snowblower 36"

Blow snow without an implement hitch



48" Dozer Blade

Excels at easily removing snow from sidewalks and driveways

Replaceable Steel Wear Edge

Single-Stage Snowblower 36"

Perfect for sidewalks and driveways, the 36" (91 cm) Single-Stage Snowblower attachment mounts directly in place of the mower deck. No separate implement hitch is required. The Snowblower is a compact, powerful addition to the Walker Mower, throwing snow up to 20 feet. It is compatible with models S, C19, T, D, and B. **P/N A11**

48" Dozer Blade

The 48" Dozer Blade incorporates a manual lifting mechanism with foot trigger release and built-in footrests not requiring an implement hitch. It features a foot-actuated, angle-adjust mechanism that allows the operator to quickly set the blade to five different angles. The blade employs trip-over protection. A replaceable steel wear edge comes standard, and an optional polyurethane wear edge is also available. The blade mount also allows +/-5 degrees of lateral articulation to follow ground contour

for even clearing over the full width of the blade. Tail weight required with use of blade. See page 29.

Models S, C, T, D, B **P/N A43**
Model R **P/N A44**

Polyurethane Wear Edge Kit 48"
available for the A43 Dozer Blade:
P/N 6625-10

Perfaerator™

The Perfaerator™ can aerate up to 60,000 square feet per hour



Reciprocating crankshaft-driven tines pull cores up to 2.75" deep

Perfaerator™

Recurring lawn aeration is a great way to keep a lawn healthy and robust, and using the Walker Perfaerator™ allows the most discerning operators to accomplish core aeration with speed and precision. This high production Walker add-on uses a rotating crankshaft and tine assembly which is 42 inches wide with 12 aeration rows. The robust frame and driveline, coupled with convenient serviceability, provide impressive durability and longevity. Compatible with Models B, C, T, D, and H. For

mounting on Model H, P/N 6689-10
Foot Mount Kit is installed in place of
the standard footrest assembly.
P/N A56

**42" aeration width makes
quick work of large areas**






Boom Sprayer

Features a 26 gallons (98.4 liters) tank, and provides a 113" (287 cm) spray pattern to apply any liquid material



Includes a dedicated manifold for precise operator control and a high-capacity pump

The stainless steel boom can fold for compact transport and storage

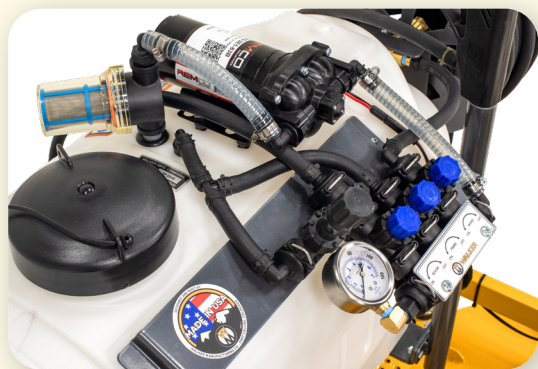

Boom Sprayer

A high-performance attachment for property maintenance, the Boom Sprayer is compatible with Models T, B, D, C, and S and 42, 48, and 52-inch decks. It offers a 113" (287 cm) spray pattern, allowing operators to apply fertilizer or weed control in an efficient manner. A spray gun with a 50-foot (15 meter) hose allows the operator to leave the mower and apply liquid material to landscape features beyond the reach of the boom. The spray tip adjusts to offer

varying output, from a mist to a 35-foot (11 meter) stream. The Boom Sprayer features a large, 26 gallon (98.4 liter) tank.

P/N A57

The Boom Sprayer spray gun with a 50-foot (15 meter) hose





Dethatcher

Lift and remove
thatch quickly
and easily



Dethatcher

The Dethatcher on the front of the Walker Mower is the ideal setup to quickly dethatch and mow a property. When used with the Grass Handling System® on Models S, C, T, and D, lawn thatch and debris are lifted, vacuumed, and collected in one pass. The Dethatcher features front-gauge wheels which allow the dethatching tines to maintain consistent depth on uneven or articulating properties.

The Dethatcher quickly attaches

to the front of most 42", 48", and 52" Walker gear-driven decks with integrated, adjustable mounting saddles. A lift lever with foot trigger lowers and raises the Dethatcher for easy transport when driving between lawn areas. Gauge wheels are adjustable to set and tune tine depth. The foldable handle allows the Dethatcher to be stored vertically against a shop wall or tied down against a trailer sidewall. **P/N A10**

Optional Wall Mount:

Securely and compactly mount the Dethatcher off the floor in a space-

saving manner on your shop or garage wall. **P/N 6606-11**

Optional Wall Mount





Spyker® Spreader Attachment



ROPS

ROPS come standard on Model H24d



See all Walker attachments:
walker.com/addons#attachments

Spyker® Spreader Attachment

The Spyker® Spreader Attachment combines a Spyker® S80-12010 Pro-Series Spreader with the versatile Walker Mower. No tools are needed to secure the spreader to the carrier frame of the Walker 42", 48", or 52" gear-driven decks.

Spyker® Spreader with Mount:
P/N A55

ROPS

The Walker Roll-Over Protection Structure (ROPS) consists of a high-strength steel roll bar and retracting inertial-reel seat belt.* The ROPS system features a hinged roll bar that can be folded down for convenient transport and storage.

Models H27i, H24d..... **P/N A30**
Model H38i..... **P/N A34**
Models C19, D, T..... **P/N A37***

**Seat belt ordered separately.
Suspension Seat (6103-14) P/N 2302-8,
Standard Seat (5103) P/N 5103-9,
Comfort Seat (6104-31) P/N 6104-7.*

ROPS can be folded down for transport and storage



Add-ons: Popular Options

Power Dump



Dump grass without leaving your seat

Hi-Dump®



Lifts up 67" (170 cm) for easy dumping into a truck or trailer



See all Walker options:
walker.com/addons#options



Utility Bed

The Utility Bed is an option for the Model B, providing convenient storage and transport of material or tools with a manual dump functionality. It is standard on Models H24d and the non-collection versions of T23, T27i, and D21d. **P/N 4650-2**

Power Dump

The Power Dump provides convenience and time savings to commercial mowing companies and homeowners alike by giving

the operator the ability to dump the grass catcher from the operator seat. A toggle switch operates the 12-volt electric linear actuator that provides the dumping and door-opening action, which completes in about 10 seconds.

Model S18 (for 7.0 bu.):

P/N A48

Model C19, (for 7.0 bu.):

P/N A46

Model C27i (for 10.0 bu.):

P/N A59

Models T, D (for 10.0 bu.):

P/N A51

Hi-Dump®

The Walker Hi-Dump® raises 67" (170 cm) and dumps collected grass and debris into a truck or trailer in a 20-second cycle, without the operator ever needing to leave the seat. Powered by a 12-volt electric/hydraulic system, the lifting and dumping functions work independently and are controlled by two toggle switches near the operator seat. It is available for Models D and T. **P/N A21**

Add-ons: Popular Options

Hand Lever
Deck Height Adjuster



Foot Pedal
Deck Height Adjuster



Fine-tune cutting height

Deck Height Adjusters

Both the Hand Lever Deck Height Adjuster and Foot Pedal Deck Height Adjuster install directly onto the Walker mowing deck. They offer quick and easy cutting height adjustments in 1/4" increments, using a single hand lever or foot pedal within reach from the operator's seat.

Hand Lever Deck Height Adjuster

C36R, S36, M36 **P/N A22**

C42, S42, M42* **P/N A23**
C48, S48, M42B, M48* **P/N A24**
C48R, C52R* **P/N A25**
S56 **P/N A28**
C42R **P/N A29**

Foot Pedal Deck Height Adjuster

C42, S42, M42* **P/N A53**
C48, S48, M42B, M48* **P/N A54**
C48R, C52R* **P/N A54**
M52* **P/N A54**

Deck Height Washers

Deck Height Washers allow finer adjustments of cutting height on compatible decks. Use these to adjust deck height by 1/4".


36", 42", 48", 52", 54", 56" gear or belt drive decks: **P/N 5727-1**
74" gear drive deck: **P/N 8727**

Deck Height Washers



*See dealer for compatibility details.

Key Walker deck design features like Flexible Deck Suspension and True Floating Deck are maintained in the Deck Height Adjuster by using slotted lift links and controlling the overall weight of the design.

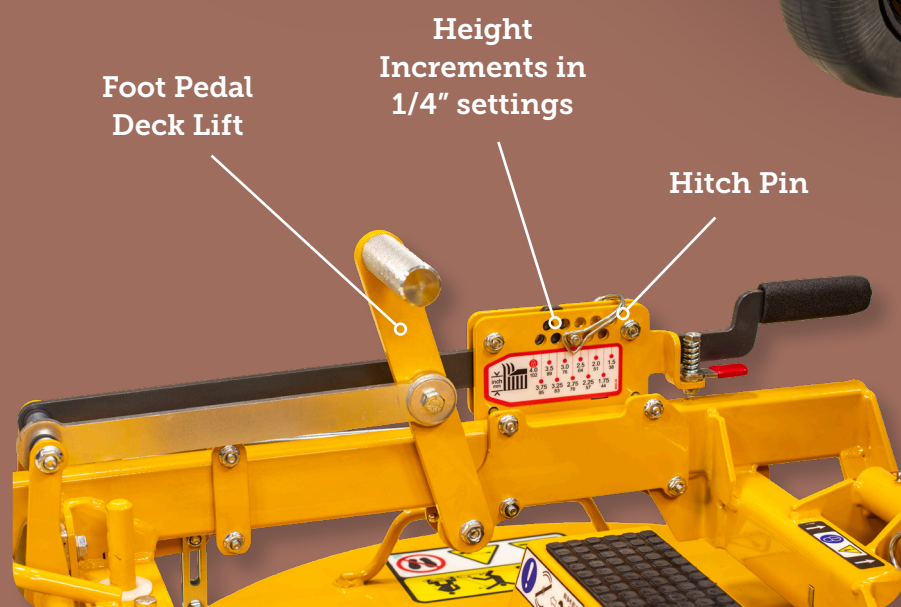

Adjust deck height from seat using a single foot pedal with the Foot Pedal Deck Height Adjuster A53 or A54



Add-ons: Popular Options

Breakaway Blades

Reduce damage when mowing debris



Dump Bins

Cut the weight in half



Dense-Pak Blades

Reduce the size of clippings



Large Hole Screen

Prevent clogging in wet conditions



Dump Bins

These two bins slide into the Walker 10-bushel catcher, making the dumping of grass clippings much easier by dividing the weight.

Set of Dump Bins.....**P/N 8510-11**
Left Dump Bin.....**P/N 8510-9**
Right Dump Bin.....**P/N 8510-10**

Large Hole Screen

The 3/4" holes in this screen help prevent clogging in wet conditions.

7.0 bu. Catcher.....**P/N 7512-13**
10.0 bu. Catcher.....**P/N 7512-11**

Breakaway Blades

For use in mowing conditions with frequent ground contact and/or excessive debris. Breakaway Blades lessen the impact and shock loading on the deck drivetrain and reduce blade damage. Cutting blades can be easily replaced or removed for sharpening.

S56.....**P/N 5705-32**
S42.....**P/N 5705-33**
S74.....**P/N 5705-34**
S48.....**P/N 7705-8**

Dense-Pak Blades

Use Dense-Pak Blades to reduce size of clippings for a more densely loaded catcher when using the Grass Handling System® (GHS); allowing for longer mowing times before needing to dump the catcher.


This blade set offers both right hand and left hand serrated wing blades for the counter-rotating function of the collection deck.

C48, C48R.....**P/N 7705-60**

Power Tilt-Up® for the Model H

Avoid heavy manual lifting by mechanically lifting the deck instead

Control panel on the rear of the
mower for safe operation

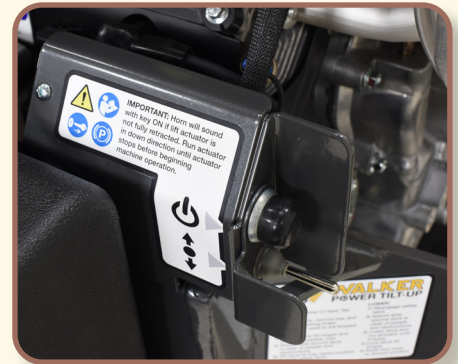

Power Tilt-Up®

Available for the Model H, the Power Tilt-Up® makes it easy to automatically tilt up decks for maintenance, transportation and storage. Tilt-up action uses a 12-volt electric linear-actuator easily mounted to any Model H mower equipped with an S61, R52, or R64 deck with adjustable footrests. The use of a tail weight is suggested when using this option (See page 29).

Models H27i, H38i..... **P/N A35**
Model H24d..... **P/N A36**

Safely and easily tilt the deck for
maintenance, storage, and transport



Add-ons: Popular Options



Dual Tail Wheel

Less turning resistance with greater agility

Spread Axle Tail Wheel

Having a wider wheel base means having better hillside stability



Adjustable Footrests

Better comfort for operators with shorter legs



Dual Tail Wheel

The Dual Tail Wheel comes standard on Models T, D, and C23i (equipped with 10.0 bu. catcher). Featuring two independent pneumatic tires, it offers less turning resistance than the Single Wide Tail Wheel, offering mowing with greater agility and precision.
P/N 7420-20 (white wheels)
P/N 7420-28 (black wheels)

Spread Axle Tail Wheel

The Spread Axle Tail Wheels track

in line with the drive tires for grass conditions where the center tail wheel track may not be preferred. This offers a clean look to the striping, improves straight tracking, and also contributes to stability when operating on hillsides.

Spread Axle Assembly:
D, T, C19 **P/N 7420-3**
C23i **P/N 7420-13**

Tank Relocation Kit Required for D21d: **P/N 7420-8**

Adjustable Footrests

These Adjustable Footrests clamp onto the carrier frame. They are easy to install and adjust, making for a comfortable ride for operators with shorter legs.

36", 42", 48", C52,
M52 **P/N 8662-10***
74" **P/N 8662-9***

*Decks prior to S/N 220949

Tail Wheel Lock

Lock tail wheel in “straight ahead” position to help create straight stripes



Big Tire Fork Kit

For faster, more comfortable operation



Taller Deck
Caster Forks

Larger,
20" Drive Tires

Taller Tail
Wheel Fork

Tail Wheel Lock

The Tail Wheel Lock uses a locking solenoid and detent to hold the tail wheel into a “straight ahead” position. This dramatically improves the ability to create straight stripes and increases stability for hillside mowing. An On/Off toggle switch located on the Forward Speed Control makes it easy to control from the operator seat. **P/N 8540**

Big Tire Fork Kit

This kit, available for Model B, uses a larger, 20" drive tire (purchased separately¹) along with taller tail wheel and deck caster forks. It provides increased cutting heights up to 5", higher ground speed, and improved operator comfort in rough conditions.

For Model B use:

- Forks for tractor
P/N 5076-16
- Forks for deck with 8" tires
P/N 5076-17
- Forks for deck with 11" tires
P/N 8765-17
- With S60 or S52², forks for deck only **P/N 5076-14**

1: 20" drive tires, required for the Big Tire Fork Kit, are purchased separately from the kit. For 20" drive Turf Tires, order two P/N 5076-3 (white wheels) 5076-9 (black wheels). For 20" drive AT Tires, order two P/N 8070-20 (white wheels) 8070-18 (black wheels). 2: See dealer for compatibility details.

Walker Mower Specifications

	S18	C19	C27i	T23	T27i	D21d	R22	R22x	B23	B27i	B27ix	H24d	H27i	H38i
Engine	B55 Vanguard	Rehiko CH620	Rehiko ECH749	Rehiko CH680	Rehiko ECH749	Kubota D722	Kohler KT722	Kohler KT722	Rehiko CH680	Rehiko ECH749	Rehiko ECH749	Rehiko KDW1003	Rehiko ECH749	Rehiko ECH980
Fuel System	Carb	Carb	EFI	Carb	EFI	Diesel	Carb	Carb	Carb	EFI	EFI	Diesel	EFI	EFI
Cooling System	Air	Air	Air	Air	Air	Liquid	Air	Air	Air	Air	Air	Liquid	Air	Air
Displacement, cc	570	674	747	674	747	719	747	747	674	747	747	1028	747	999
HP @ 3600 RPM	18	19	26.5	22.5	26.5	20.9	22	22	22.5	26.5	26.5	23.7	26.5	38
Max Torque, ft-lbs	29.2	35	40	36.8	40	34	40.4	40.4	36.8	40	40	36.8	40	58
Fuel Capacity, US gal (liter)	4 (15.1)	4 (15.1)	4.7 (17.8)	4.7 (17.8)	4.7 (17.8)	4.7 (17.8)	3 (11.4)	3 (11.4)	4.7 (17.8)	4.7 (17.8)	9.4 (35.6)	9.4 (35.6)	9.4 (35.6)	9.4 (35.6)
Drive Tire Size, diameter x width	18x8.5	18x8.5	20x10	18x9.5	18x9.5	18x9.5	18x8.5	20x8	18x8.5	18x8.5	20x12	23x10.5	23x10.5	23x10.5
Top Speed, MPH (km/h)	7.4 (12)	6.5 (10.5)	8 (13)	6.5 (10.5)	6.5 (10.5)	6.5 (10.5)	7 (11.3)	8 (13)	8 (13)	8 (13)	9.6 (13)	10 (16)	10 (16)	10 (16)
Tractor + Deck ¹ Length inch (cm)	89.25 (226.69)	89.25 (226.69)	96.25 (244.47)	93 (236.22)	93 (236.22)	93 (236.22)	91 (231)	92.25 (234.3)	90.75 (230)	90.75 (230.50)	97 (246.38)	107.75 (274)	107.75 (274)	107.75 (274)
Tractor + Deck ¹ Tilted Length inch (cm)	77 (195.58)	77 (195.58)	77 (195.58)	77 (195.58)	77 (195.58)	77 (195.58)	74 (188)	70 (178)	72 (183)	72 (182.88)	80 (203.2)	87.75 (222.88)	87.75 (222.88)	87.75 (222.88)
Height, inch (cm)	46.5 (118.11)	47.5 (120.65)	50 (127)	50 (127)	50 (127)	50 (127)	42 (106.68)	42.25 (107.3)	39.5 (100.35)	39.5 (100.33)	45.5 (115.57)	50.5 ² (128.27)	47.25 (120)	47.25 (120)
Tractor Only Width, inch (cm)	38.5 (98)	37.75 (95.88)	41 (104.14)	39 (99.06)	39 (99.06)	39 (99.06)	39 (99.06)	40 (101.6)	38.5 (97.79)	38.5 (97.79)	49.5 (125.73)	46.5 (118.11)	46.5 (118.11)	46.5 (118.11)
Tractor Only Weight, lb (kg)	675 (306)	762 (346)	780 (354)	820 (372)	815 (370)	1000 (454)	404 (183)	482 (218.6)	600 (272)	606 (275)	720 (326.6)	997 (452)	748 (340)	808 (367)
Tractor + Deck ² Weight, lb (kg)	866 (393)	953 (432)	991 (440)	1039 (471)	1034 (469)	1219 (553)	575 (260)	661 (299.8 kg)	812 (368)	812 (368)	1111 (504)	1434 (650)	1185 (537)	1245 (565)

¹S, C19, C42, C23i, T and D: C48, R: S48, B23&B27i: M48, B27ix: S60, H: R64, ²S: C36, C19: C42, T and D: C48, R: 42" B: S48, H: R64, ³ROPS folded. Note: The A21 Hi-Dump Kit weighs 175 lbs (79 kg).

Standard Features

- Gasoline engines require unleaded 87+ octane
- Diesel engines require 2-D
- Full pressure lube systems with filter
- Heavy-duty stamped steel cutting blades, tempered
- Flywheel alternator charging, D21d has belt-driven alternator
- Internal mechanical parking brake
- Safety circuitry provided by safety switches: seat, transmission neutral, blade clutch, and parking brake
- Electric blade clutch with easy pull/push switch operation on Models R, B, S and C27i
- Dual-lever steering, precision friction-lock Forward Speed Control lever with neutral/park position
- All machines feature dual, independent hydrostatic transmissions
- Cutting height 1.5" to 4", 1.5" to 4.5", or 1" to 5", varies per model
- Welded, heavy gauge, steel chassis
- Decks and add-ons powered by splined PTO shaft with dual u-joints allowing dynamic articulation, except for the Model R
- Deck carrier frame with flexible deck suspension, caster wheels, and counterweight springs
- Welded, 14 gauge steel bodies
- Welded, 11 gauge steel decks
- 12V electrical systems
- Blade clutch and brake with manual belt tightener C19, T, D, H

